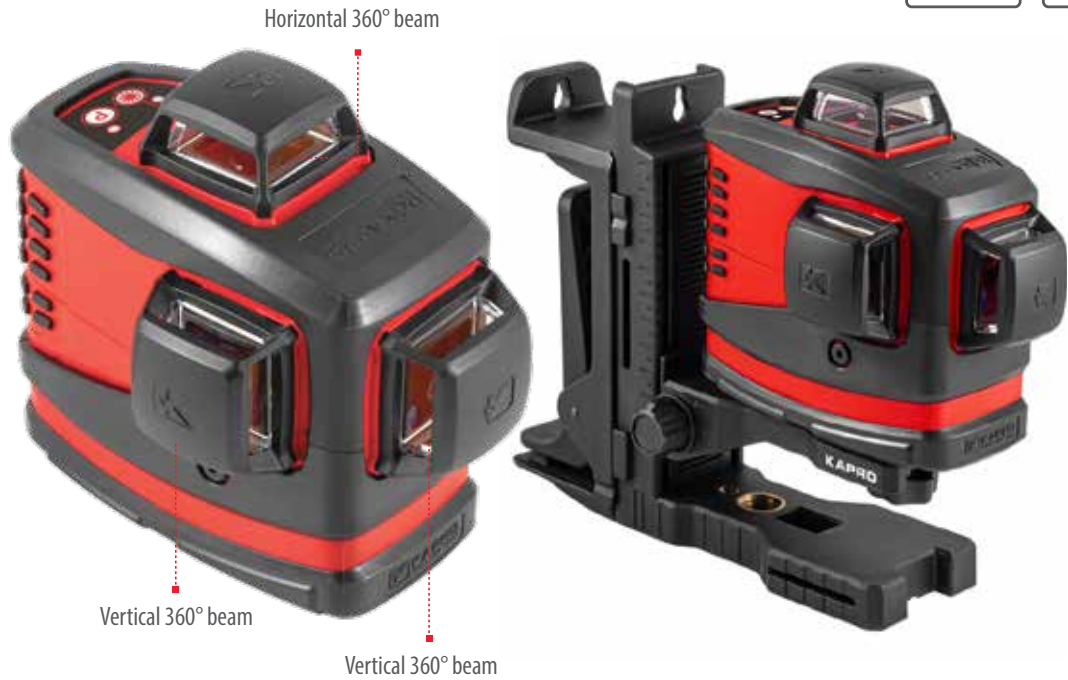


**3 YEAR
LIMITED
WARRANTY****IP65
WATER & DUST
RESISTANT**

TECHNICAL DATA

- Accuracy: ± 0.2 mm/m (± 0.0002 in/in)
- Self-leveling: $\pm 2.5^\circ$
- Self-leveling type: Pendulum
- Laser range:
 - Without detector: 30 m (100 ft)
 - With detector: 60 m (200 ft)
- Shock resistant rubber over molded cover
- Visual "Out of Leveling Range" warning
- Manual mode for angular layout / marking
- Pulse mode
- 1/4" and 5/8" tripod threads

APPLICATIONS

- Tiling
- Masonry
- Drywall Installation
- Woodworking

OPTIONAL

- 883B with softbag (no wall mount & ceiling clamp)



KIT INCLUDES

- Multi-purpose magnetic mount
- 2 x rechargeable lithium batteries
- AA batteries holder
- Beamfinder™ glasses
- Laser target
- Carrying case

