



# LASER LEVELS & SENSORS



CATALOG  
**2025**



**“The Best Way  
to Predict the Future  
is to Create It.”**

*Abraham Lincoln*

# THE STORY OF KAPRO



# ABOUT US

For over 30 years, we have dedicated ourselves to the development and production of the best layout and measuring tools in the market. Our spirit levels, laser levels and layout and marking tools are produced with the customer in mind and are manufactured to the highest possible quality and standards.

Through our state of the art facilities in Israel, China and the United States, we have built a global network of partners that cater the needs of professionals around the world.

## INNOVATION & DESIGN

Kapro's R&D team has revolutionized the layout & measuring tool design, introducing a variety of ground-breaking inventions to the market:

The Plumb Site® Dual-view™- the only level feature in the market providing a frontal view of the plumb vial, eliminating parallax error as well as neck and back strain due to vertical plumb jobs.

The OptiVision® Red Vial - a new standard in vial visibility, achieved by creating a clear color outline around the spirit level's bubble. The clearest, most visible vial on the market today.

Laser positioning legs – with anti-slip grips and multiple angle options, our patented strong folding legs simplify angle mounting and height adjustment of lasers.

Prolaser® levels – offer a complete line of powerful lasers, that when combined with variable combination sets, offer the customer a staggering array of choices.

Specialty levels – unique levels that cater the specific needs of professionals in various trades such as drywall installation, plumbing and electrical work.

## QUALITY

Kapro is dedicated to excellence in every aspect: production, distribution, sales and marketing.

We solely use the highest quality materials and components, from the strongest yet lightest steel and aluminium spirit levels to the most advanced, reliable modules in laser levels.

Kapro is the only level manufacturer in the world to carry the prestigious VPA mark of quality and all our manufacturing facilities are compliant with ISO Standards 9001, 14001 and SA8000. All Kapro lasers and electronic products carry FDA and CE certification, and comply with RoHS, WEEE and REACH regulations.

In addition, Kapro adheres to strict calibration and testing standards for all products, ensuring the highest level of accuracy in the market.

## SERVICE & VALUE

The Kapro team strives to supply value to our customers through excellent products and the highest level of service. Our dedicated customer service team is constantly listening and responding to customers, ensuring their needs are met in a professional and timely manner.




**KAPRO® - TOOLS WITH VISION**

# CONTENT

ABOUT US	5
ROTARY LASERS	8
LINE LASERS	10
DOT LASERS	24
DIY LASERS	25
LASER SETS	26
SENSORS	28
LASER ACCESSORIES	32

# 8991G

## PROLASER® ELECTROTA®

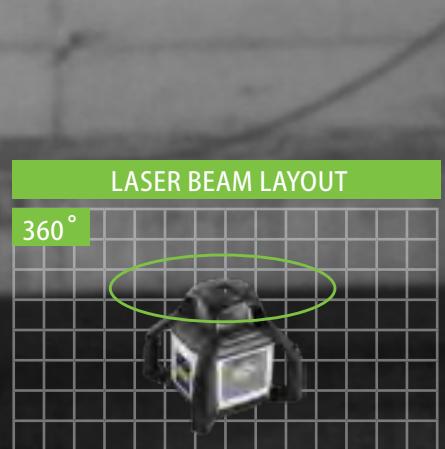

### LASER BEAM LAYOUT

360°



### QUALITY ASSURANCE

IP65  
WATER & DUST  
RESISTANT

2 YEAR  
LIMITED  
WARRANTY

### TECHNICAL DATA

- Accuracy:  $\pm 0.1 \text{ mm/m}$  ( $\pm 0.0001 \text{ in/in}$ )
- Self-leveling:  $\pm 5^\circ$
- Self-leveling type: Electronic
- Manual leveling of up to  $\pm 5^\circ$  in both X and Y planes for slopes and gradients
- Laser range with detector: 300 m (980 ft)
- Laser range without detector: 50 m (165 ft)
- Protective shock absorbing cover
- Durable handles
- 5 customizable rotation speeds: 0 (Stationary Point), 60, 120, 300, 600 rpm
- 6 scan modes create visible laser lines for diverse applications
- Visual & audible "Out of Leveling Range" warning
- 5/8" tripod thread for flat & 90° mounting




### KIT INCLUDES

- Remote control
- Laser detector
- Beamfinder™ glasses
- Laser target
- Rechargeable batteries
- Battery charger
- 2 X battery brackets for regular & rechargeable batteries
- Shockproof protective case



## MAESTRO 4D

### ALL-LINES GREEN LASER

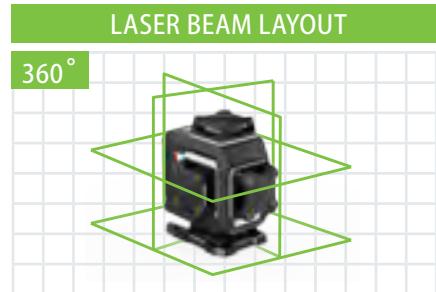


#### QUALITY ASSURANCE

IP65  
WATER & DUST  
RESISTANT

2 YEAR  
LIMITED  
WARRANTY

#### TECHNICAL DATA


- Accuracy:  $\pm 0.2 \text{ mm/m}$  ( $\pm 0.0002 \text{ in/in}$ )
- Self-leveling:  $\pm 3^\circ$
- Self-leveling type: Pendulum
- Dimensions: 133 mm x 89 mm x 140 mm
- Laser range:
  - Without detector: 30 m (100 ft)
  - With detector: 70 m (230 ft)
- Visual and auditory "Out of Leveling Range" warning
- ECO mode for up to 15 hours of continuous operation
- Manual mode for angular layout/markings
- Flash mode for improved visibility in bright environments
- Pulse mode
- Top and bottom 1/4" tripod threads
- USB Type C port for easy charging
- Wireless charging
- 1 m (3.3 ft.) drop tested

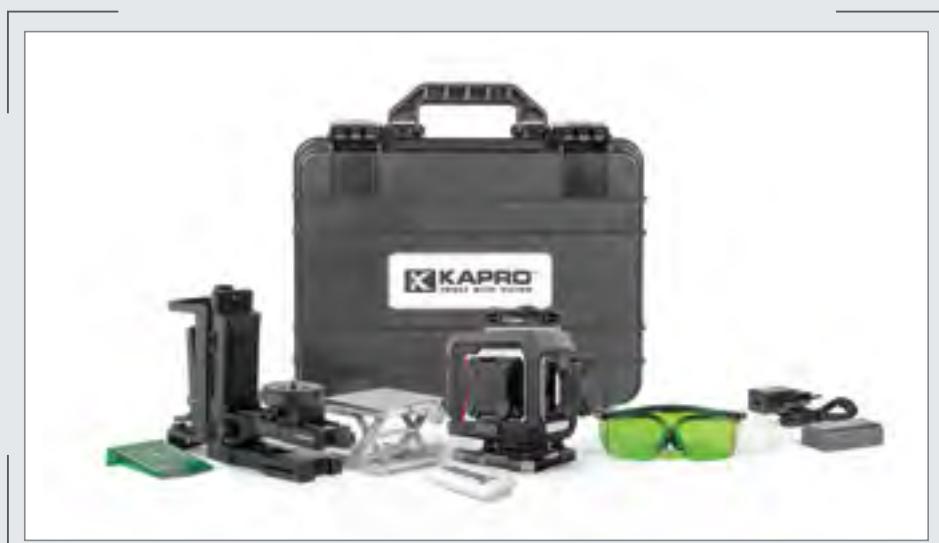

#### KIT INCLUDES

- Multi-purpose magnetic mount
- Green Beamfinder™ Glasses
- Laser Target
- Type-C USB charger
- Remote control
- Hard Carrying Case
- Elevating Platform
- Lithium-ion Battery pack

## MAESTRO 3D ALL-LINES GREEN LASER

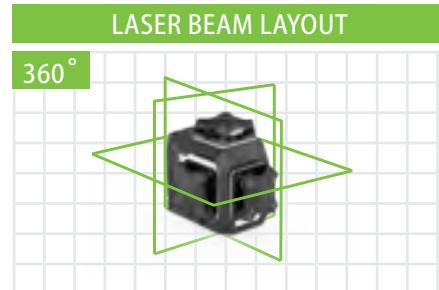


### QUALITY ASSURANCE

**IP65**  
WATER & DUST  
RESISTANT

**2 YEAR**  
LIMITED  
WARRANTY

### TECHNICAL DATA


- Accuracy:  $\pm 0.2 \text{ mm/m}$  ( $\pm 0.0002 \text{ in/in}$ )
- Self-leveling:  $\pm 3^\circ$
- Self-leveling type: Pendulum
- Dimensions: 133 mm x 89 mm x 140 mm
- Laser range:
  - Without detector: 30 m (100 ft)
  - With detector: 70m (230 ft)
- Visual and auditory "Out of Leveling Range" warning
- ECO mode for up to 15 hours of continuous operation
- Manual mode for angular layout/markings
- Flash mode for improved visibility in bright environments
- Pulse mode
- Top and bottom 1/4" tripod threads
- USB Type C port for easy charging
- Wireless charging
- 1 m (3.3 ft.) drop tested

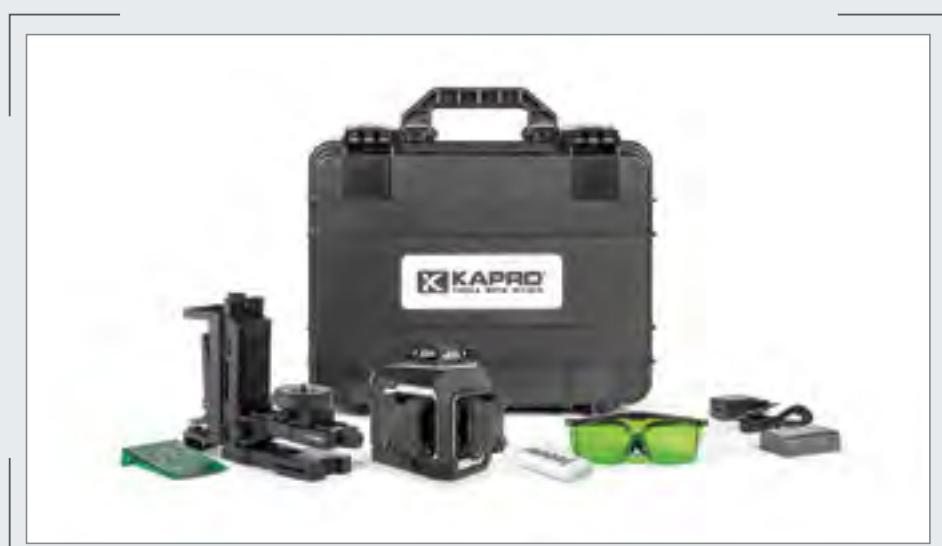

### KIT INCLUDES

- Multi-purpose magnetic mount
- Green Beamfinder™ Glasses
- Laser Target
- Type-C USB charger
- Remote control
- Hard Carrying Case
- Lithium-ion Battery pack

## 884G PROLASER® 4D XTRA

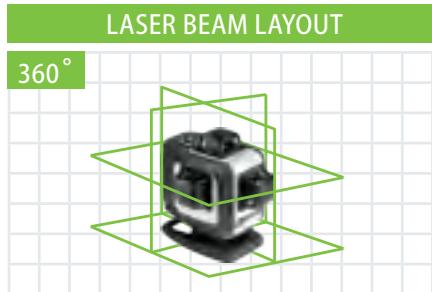

### LASER BEAM LAYOUT

360°

### QUALITY ASSURANCE

IP54  
WATER & DUST  
RESISTANT

3 YEAR  
LIMITED  
WARRANTY

### TECHNICAL DATA


- Accuracy:  $\pm 0.15 \text{ mm/m}$  ( $\pm 0.00015 \text{ in/in}$ )
- Self-leveling:  $\pm 4^\circ$
- Self-leveling type: Electronic
- Laser range with detector: 70 m (230 ft)
- Laser range without detector: 30 m (100 ft)
- Shock resistant rubber over molded cover
- Visual & audible "Out of Leveling Range" warning
- Manual mode for angular layout / marking
- Pulse mode
- 1/4" tripod thread



### KIT INCLUDES

- 2 X rechargeable Li-Ion batteries
- Charger
- Multi-purpose magnetic mount
- Beamfinder™ glasses
- Elevating platform
- Laser target
- Carrying case

## 883G PROLASER® 3D ALL LINES

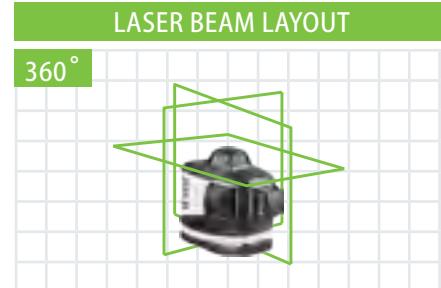

### LASER BEAM LAYOUT

360°

### QUALITY ASSURANCE

IP65  
WATER & DUST  
RESISTANT

3 YEAR  
LIMITED  
WARRANTY

### TECHNICAL DATA

- Accuracy:  $\pm 0.2 \text{ mm/m}$  ( $\pm 0.0002 \text{ in/in}$ )
- Self-leveling:  $\pm 2.5^\circ$
- Self-leveling type: Pendulum
- Laser range with detector: 70 m (230 ft)
- Laser range without detector: 30 m (100 ft)
- Shock resistant rubber over molded cover
- Visual "Out of Leveling Range" warning
- Manual mode for angular layout / marking
- Pulse mode
- 1/4" and 5/8" tripod threads

### OPTIONAL


- 883GB with softbag  
(no wall mount & ceiling clamp)




### KIT INCLUDES

- Multi-purpose magnetic mount
- 2 x rechargeable lithium batteries
- AA batteries holder
- Beamfinder™ glasses
- Laser target
- Carrying case

## 875G PROLASER® ALL LINES

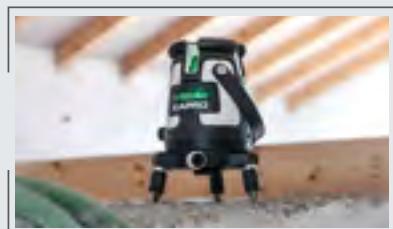

### LASER BEAM LAYOUT

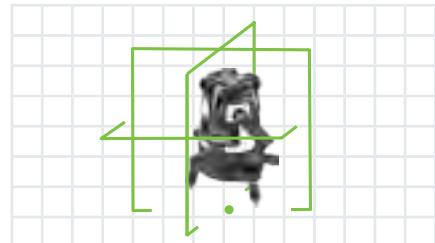

### QUALITY ASSURANCE

**IP54**  
WATER & DUST  
RESISTANT

**3 YEAR**  
LIMITED  
WARRANTY

### TECHNICAL DATA



- Accuracy:  $\pm 0.2 \text{ mm/m}$  ( $\pm 0.0002 \text{ in/in}$ )
- Self-leveling:  $\pm 2.5^\circ$
- Self leveling type: Pendulum
- Laser range with detector: 60 m (200 ft)
- Laser range without detector: 30 m (100 ft)
- Shock resistant rubber over molded cover
- Adjustable support legs
- Manual mode for angular layout / marking
- Pulse mode
- 360° rotation with fine adjustment knob
- Top surface bubble level
- 5/8" Tripod thread

### OPTIONAL

- 875S/ 875GS PROLASER® Layout Set with tripod (886-28) & Carrying case
- 875 HYBRID PROLASER® ALL-LINES green beam version

### KIT INCLUDES

- 2 x rechargeable lithium battery
- Beamfinder™ Glasses
- Laser target
- Micro USB charging cable
- Soft carrying case

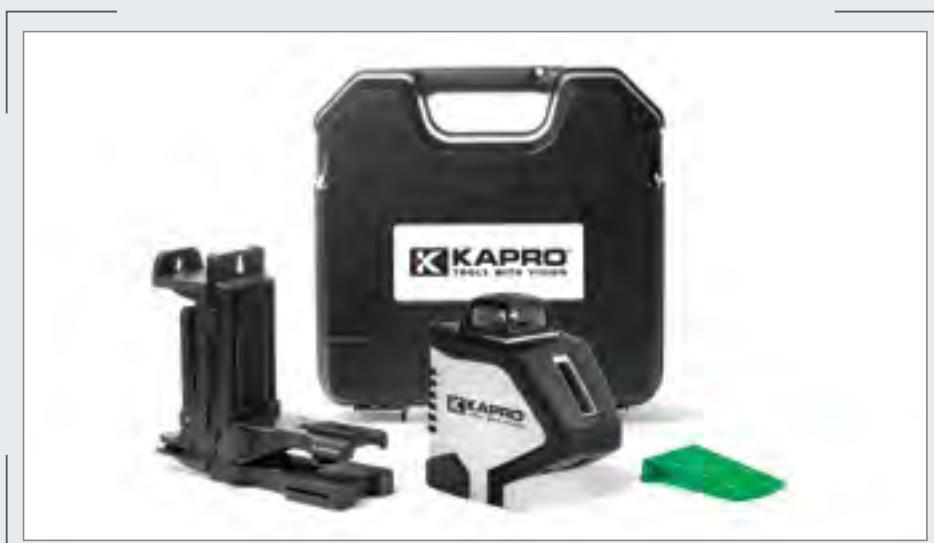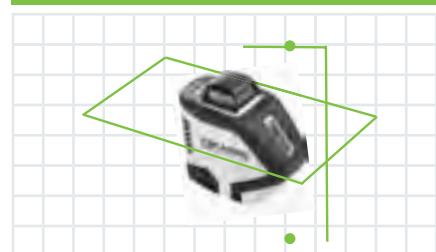**962G****PROLASER® MULTIBEAM  
ORBITAL LASER****LASER BEAM LAYOUT****QUALITY ASSURANCE****IP65**  
WATER & DUST  
RESISTANT**2 YEAR**  
LIMITED  
WARRANTY**TECHNICAL DATA**

- Accuracy:  $\pm 0.3 \text{ mm/m}$  ( $\pm 0.0003 \text{ in/in}$ )
- Self-leveling:  $\pm 3^\circ$
- Self leveling type: Pendulum
- Laser range with detector: 60 m (200 ft)
- Laser range without detector: 30 m (100 ft)
- Shock resistant rubber over molded cover
- Manual mode for angular layout / marking
- Pulse mode
- 1/4" and 5/8" tripod threads

**OPTIONAL**

- 962B / 962GB With soft bag, target & Beamfinder™ Glasses
- 962S / 962GS With pouch & tripod (Kapro 886-19)


**KIT INCLUDES**

- 4 X AA batteries
- Multi-purpose magnetic mount
- Laser target
- Carrying case

## 873G PROLASER® VECTOR



### LASER BEAM LAYOUT

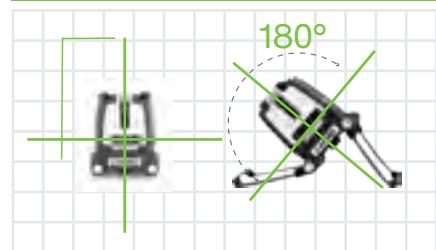

### QUALITY ASSURANCE

**IP54**  
WATER & DUST  
RESISTANT

**2 YEAR**  
LIMITED  
WARRANTY

**PATENTED**

### TECHNICAL DATA

- Accuracy:  $\pm 0.2 \text{ mm/m}$  ( $\pm 0.0002 \text{ in/in}$ )
- Self-leveling:  $\pm 3^\circ$
- Self leveling type: Pendulum
- Laser range with detector: 60 m (200 ft)
- Laser range without detector: 30 m (100 ft)
- Shock resistant rubber over molded cover
- Adjustable metal folding legs for angle mounting and height adjustment
- Anti-slip grips
- Manual mode for angular layout / marking
- Pulse mode
- Visual & audible "Out of Leveling Range" warning
- 1/4" tripod thread

### OPTIONAL

- 873S PROLASER® VECTOR SET with 3.2 m (10.5 ft) / 1.3 m (4.3 ft) pole tripod
- 873GS PROLASER® VECTOR SET green laser, pole tripod (Kapro 886-58) and adjustable laser mount (1/4" thread)

### INCLUDES

- Pouch
- 3 X AA batteries
- 5/8" tripod adaptor

# 872G

## PROLASER® PLUS



## — QUALITY ASSURANCE —

**IP54**  
WATER & DUST  
RESISTANT

**2 YEAR**  
LIMITED  
WARRANTY

**PATENTED**

## — TECHNICAL DATA —

- Accuracy:  $\pm 0.2 \text{ mm/m}$  ( $\pm 0.0002 \text{ in/in}$ )
- Self-leveling:  $\pm 3^\circ$
- Self leveling type: Pendulum
- Laser range with detector: 60 m (200 ft)
- Laser range without detector: 30 m (100 ft)
- Shock resistant rubber over molded cover
- Adjustable metal folding legs for angle mounting and height adjustment
- Anti-slip grips
- Manual mode for angular layout / marking
- Pulse mode
- Visual & audible "Out of Leveling Range" warning
- 1/4" tripod thread


## — OPTIONAL —

- 872L PROLASER® PLUS with wall mount
- 872S/ 872GS PROLASER® PLUS SET with 1.3 m (4.3 ft) tripod

## — INCLUDES —

- 3 X AA batteries
- 5/8" tripod adaptor
- Pouch


## — LASER BEAM LAYOUT —

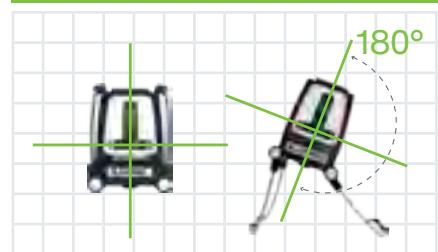

## 870G VHX PROLASER® VIP



### LASER BEAM LAYOUT

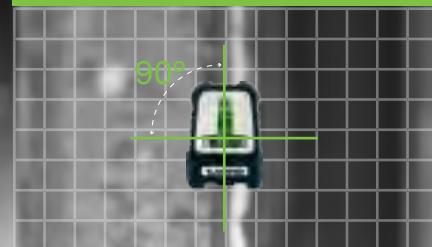

### QUALITY ASSURANCE

**IP65**  
WATER & DUST  
RESISTANT

**2 YEAR**  
LIMITED  
WARRANTY

### TECHNICAL DATA

- Accuracy:  $\pm 0.2 \text{ mm/m}$  ( $\pm 0.0002 \text{ in/in}$ )
- Self-leveling:  $\pm 3^\circ$
- Self-leveling type: Pendulum
- Laser range with detector: 60 m (200 ft)
- Laser range without detector: 30 m (100 ft)
- Shock resistant rubber over molded cover
- Manual mode for angular layout / marking
- Pulse mode
- Visual & audible "Out of Leveling Range" warning
- 1/4" tripod thread
- 5/8" tripod thread for flat & 90° mounting



### KIT INCLUDES

- 3 X AA batteries
- Laser target
- Wall mount
- Carrying case




KAPRO

**862G**

PROLASER® CROSS LINE



#### LASER BEAM LAYOUT

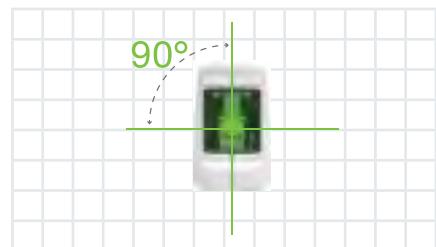

#### QUALITY ASSURANCE

**IP54**  
WATER & DUST  
RESISTANT

**2 YEAR**  
LIMITED  
WARRANTY

#### TECHNICAL DATA

- Laser accuracy:  $\pm 0.4 \text{ mm/m}$  ( $\pm 0.0004 \text{ in/in}$ )
- Self-leveling:  $\pm 3^\circ$
- Self-leveling type: Pendulum
- Laser range without detector: 20 m (65 ft)
- Magnetic V-Groove back for easy mounting
- Hanging hole
- Manual mode for angular layout / marking
- Visual "Out of Leveling Range" warning
- Locking pendulum mechanism
- 1/4" tripod thread

#### OPTIONAL

- 862S/ 862GS PROLASER® CROSS LINE LASER SET with 1.3 m (4.3 ft) tripod

#### KIT INCLUDES

- Hook and loop strap
- 2 X AA batteries
- Soft carrying case




**842G**

PROLASER® BAMBINO™




Vertical beam

Horizontal beam

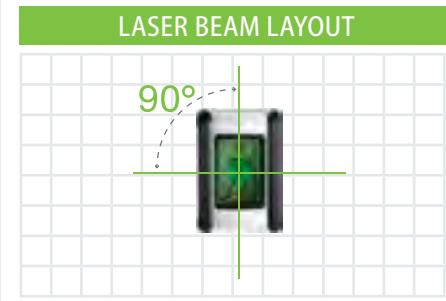

#### LASER BEAM LAYOUT

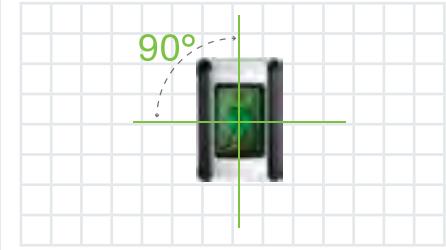

#### QUALITY ASSURANCE

**IP54**  
WATER & DUST  
RESISTANT

**2 YEAR**  
LIMITED  
WARRANTY

#### TECHNICAL DATA

- Accuracy:  $\pm 0.4 \text{ mm/m}$  ( $\pm 0.0004 \text{ in/in}$ )
- Self-leveling:  $\pm 3^\circ$
- Self leveling type: Pendulum
- Laser range without detector: 15 m (50 ft)
- Shock resistant rubber over molded cover
- Manual mode for angular layout / marking
- Visual "Out of Leveling Range" warning
- 1/4" tripod thread

#### OPTIONAL


- 842/842G PROLASER® BAMBINO™ SET with FLEXIBLE MINI TRIPOD (886-08)

#### KIT INCLUDES

- 2 X AA batteries



# NUCLEO™ MINI 3D GREEN LASER

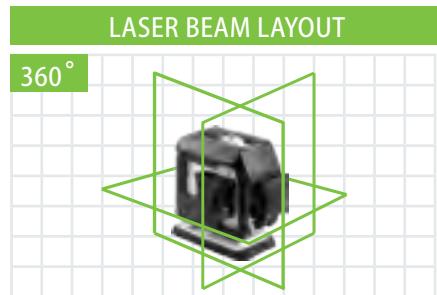

## QUALITY ASSURANCE

**IP54**  
WATER & DUST  
RESISTANT


**2 YEAR**  
LIMITED  
WARRANTY

## TECHNICAL DATA

- Accuracy:  $\pm 0.2 \text{ mm/m}$  ( $\pm 0.0002 \text{ in/in}$ )
- Self-leveling:  $\pm 3^\circ$
- Self-leveling type: Pendulum
- Laser range with detector: 60 m (200 ft)
- Laser range without detector: 30 m (100 ft)
- Visual "Out of Leveling Range" warning
- Manual mode for angular layout / marking
- Flash mode for improved visibility in bright environments
- Pulse mode
- Top and bottom 1/4" tripod threads
- USB Type C port for easy charging

## OPTIONAL

- Soft bag (no wall mount)

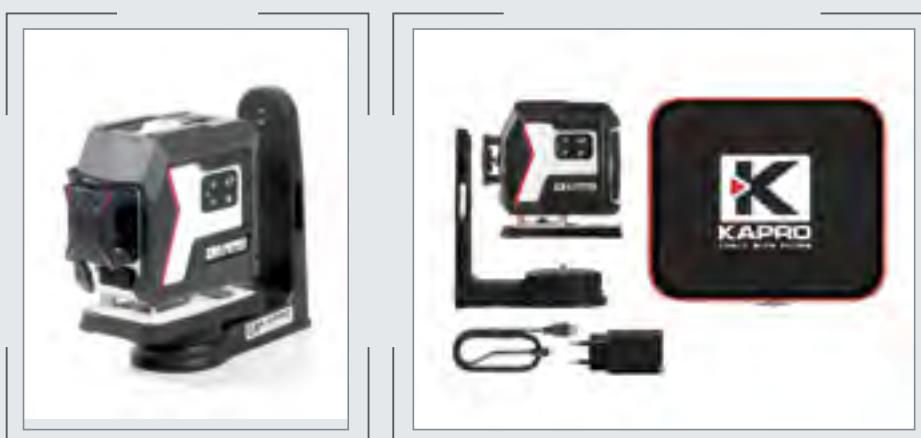

## KIT INCLUDES

- Charger
- Wall mount
- Bag




# 896G

## PROLASER® 5-DOT



### LASER BEAM LAYOUT

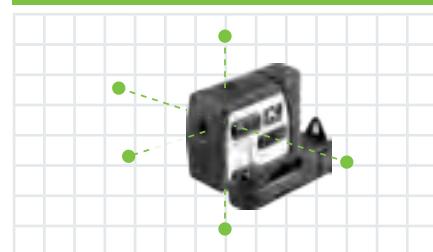

### QUALITY ASSURANCE

**IP54**  
WATER & DUST  
RESISTANT

**2 YEAR**  
LIMITED  
WARRANTY

### TECHNICAL DATA

- Accuracy:  $\pm 0.3 \text{ mm/m}$  ( $\pm 0.0003 \text{ in/in}$ )
- Self-leveling:  $\pm 3.5^\circ$
- Self leveling type: Pendulum
- Laser range with detector: 50 m (165 ft)
- Laser range without detector: 20 m (65 ft)
- Shock resistant rubber over molded cover
- Hanging hole
- 1/4" and 5/8" tripod threads

### KIT INCLUDES

- Magnetic multi-functional base
- Laser target
- 2 X AA batteries
- Hook and loop strap
- Soft carrying case



## 810

### PROLASER® NAIL GRIPPER™



#### TECHNICAL DATA

- Laser range: up to 6 m (20 ft)
- 2 cylindrical vials:
  - 1 horizontal beam
  - 1 vertical beam
- Patented rubber grip for holding any size of nails or screws
- Pressure-activated power switch

#### KIT INCLUDES

- 2 X AAA batteries
- Magnetic wristband for holding nails or screws

## 814

### LINE LASER & STUD FINDER



#### TECHNICAL DATA

- Laser range: up to 6 m (20 ft)
- 2 cylindrical vials:
  - 1 vertical
  - 1 horizontal
- Integrated magnetic stud finder
- Angle-setting mount enables horizontal, vertical or 45° laser line
- Rubber overmold for improved grip

## 893

### T-LASER™



#### TECHNICAL DATA

- 90° highly visible laser beam
- Laser range: 3 m (10 ft)
- Spring grip slides onto edge of standard boards 6.4 mm - 15.9 mm (1/4" - 5/8")
- Pressure-activated power switch
- Bi-material molded case with rubber overlay
- Compact & ergonomic design
- Handy belt clip

#### KIT INCLUDES

- 2 X AAA batteries

## 816 & 509 SET



- 816 LINE LASER
- 509 MEASURING TAPE



## 842 & 510 SET



- 842 CROSS LINE LASER LEVEL
- 510 MEASURING TAPE



# PRO ALL-IN-ONE KIT

## KIT INCLUDES

- 842G Green Cross laser
- 771M-15CM Level with magnified vial and Milled, Magnetic V-Groove Base
- 309-30 cm Square with unique support ledge and angle marking
- 509-5M Measuring Tape
- 18 mm Rebound Cutting Knife
- Magnetic Flathead and Phillips Screwdrivers
- Flexible Mini Tripod
- 2x AA Batteries
- Ball Pen



**KAPRO**  
TOOLS WITH VISION

**377**

KAPROMETER™ K7



**363**

KAPROMETER™ K3



QUALITY ASSURANCE



**2 YEAR  
LIMITED  
WARRANTY**

TECHNICAL DATA

- Measurements range: 0.05 - 100 m (0.16 - 328 ft)
- Accuracy:  $\pm 1.5$  mm
- Resolution: 0.001 m
- Measurement speed: 0.5 Sec
- Battery life: 10,000 measurements
- Built-In flip cover
- Dynamic measuring
- Area / Volume / Pythagoras measurement
- Storage of up to 50 measurements
- Integrated inclinometer
- Up to 3 reference points
- 1/4" tripod thread

KIT INCLUDES

- 2 X AAA batteries
- Carrying pouch

QUALITY ASSURANCE

**2 YEAR  
LIMITED  
WARRANTY**

TECHNICAL DATA

- Measurements range: 0.05 - 30 m (0.16 - 100 ft)
- Accuracy:  $\pm 2$  mm
- Resolution: 1 mm
- Measurement speed: 0.5 sec
- Battery life: 5000 measurements
- Built-In flip cover
- Keypad protection
- Area / Volume / Pythagoras measurement
- Dynamic measuring
- Storage of up to 20 measurements
- Up to 2 reference points

KIT INCLUDES

- 2 X AAA batteries
- Carrying pouch

**379****MOISTURE METER****389****MULTISCANNER STUD FINDER****398****TERMOSCAN™****QUALITY ASSURANCE****2 YEAR  
LIMITED  
WARRANTY****TECHNICAL DATA**

- Measurement range:
  - Timber moisture: 6% to 60%
  - Building material moisture: 1.5% to 33%
- Accuracy:
  - Moisture:  $\pm 2\%$
  - Temperature:  $\pm 2^\circ\text{C} (\pm 4^\circ\text{F})$
- 8 calibration scales for various wood types
- Hold function for measurement freeze
- Ergonomic rubber overmold for improved gripping

**KIT INCLUDES**

- 2 X AAA batteries

**QUALITY ASSURANCE****2 YEAR  
LIMITED  
WARRANTY****TECHNICAL DATA**

- Detection depth:
  - Metal pipes: up to 18 mm (0.7")
  - Copper pipes: up to 30 mm (1.20")
  - Other metal objects: up to 50 mm (2")
  - Studs: up to 18 mm (0.7")
- Detection of AC wires, metal, wood and studs
- Detection buzzer
- Automatic scan

**QUALITY ASSURANCE****2 YEAR  
LIMITED  
WARRANTY****TECHNICAL DATA**

- Temperature measurement range:  $-50^\circ\text{C}$  to  $650^\circ\text{C}$  ( $-58^\circ\text{F}$  to  $1202^\circ\text{F}$ )
- Emissivity: 0.10 ~ 1.0 adjustable
- Optical resolution: 12:1 distance to spot size ratio
- Dual laser for accurate measurement
- Internal memory of up to 20 readings
- Adjustable high/low set points with audible alarm alerts
- Lock function for continuous reading

**KIT INCLUDES**

- Pouch
- 9V battery

**397**

## DEEP VISION™ BORESCOPE



**399**

## THERMO-VISION™



### QUALITY ASSURANCE

**IP67**  
WATER & DUST  
RESISTANT

### TECHNICAL DATA

- Temperature measurement range: 0°C to -40°C (32°F to -113°F)
- 8.5 mm high sensitivity camera
- Screen resolution: 320 x 240 px
- 3.5" true color LCD screen
- 4 GB internal memory
- 360° LCD image rotation
- Independent 1W light on front
- x 4 Zoom
- 1 m / 3 m (3 ft / 10 ft) flexible camera cable

### KIT INCLUDES

- Carrying case
- USB charging cable
- 1 m / 3 m (3 ft / 10 ft) flexible camera cable

### QUALITY ASSURANCE

**IP54**  
WATER & DUST  
RESISTANT

**2 YEAR  
LIMITED  
WARRANTY**

### TECHNICAL DATA

- Measurement accuracy:
  - Up to 300°C:  $\pm 2^\circ\text{C}$  or  $\pm 2\%$
  - Above 300°C:  $\pm 5\%$
- Temperature measurement range:
  - 20°C to 450°C (-4° F to 842° F)
- Thermal image resolution: 160 x 120 px
- Visible image resolution: 0.3 Mp
- Thermal sensitivity: 0.07°C
- Provide a thermal image based on real-time temperature distribution
- 5 color pallets for optimal image clarity
- Switchable highest & lowest temperature cursors
- Built-in chargeable battery

### KIT INCLUDES

- USB cable for charging and data transfer
- Carrying case



**KAPRO**  
TOOLS WITH VISION  
RoHS CE

MENU


## 840G/840 BEAMFINDER™ GLASSES

- Enhances visibility of laser beam



## 845G/845 MAGNETIC LASER LEVEL TARGET

- For maximum visibility of laser beams projected onto non-solid surfaces
- Special reflective surface
- Graduations marks: cm | in
- Compact & lightweight design

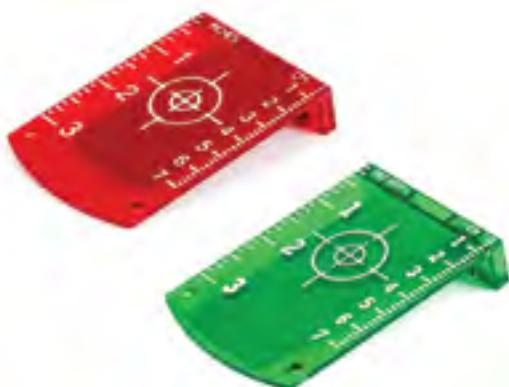

## 894-04G/894-04 BEAM LASER DETECTOR

- Locate laser beams with laser levels of a corresponding color on pulse mode
- High accuracy:  $\pm 1.5$  mm
- Low accuracy:  $\pm 2.5$  mm
- Outdoor range: up to 50 m (165 ft)



**886-23**UNIVERSAL MAGNETIC  
WALL MOUNT

- Clamping unit for mounting on profiles or pipes
- 1/4" thread (base thread is 1/8" & 1/4")
- Rare-Earth magnets
- Anti-slip padding
- 2 hanging holes

**886-08**

## FLEXIBLE MINI TRIPOD

- Adjustable legs
- Height: 21 cm (8.26")

**886-24**MULTIFUNCTIONAL  
MAGNETIC MOUNT

- 1/4" thread (base thread is 1/8" & 1/4")
- Rare-Earth magnets
- Anti-slip padding
- 2 hanging holes
- V-Groove
- Hook and loop strap
- Additional height adjustment

**886-25**MAGNETIC MULTI-  
FUNCTIONAL BRACKET

- Locking screw for stability
- Standard 5/8" UNC thread
- 1/4" thread adaptor



## 886-19

### LIGHTWEIGHT ADJUSTABLE LASER TRIPOD

- Adjustable legs up to: 1.50 m (4.92 ft)
- With carrying handle
- 1/4" thread



## 886-48

### PROFESSIONAL TRIPOD FOR LASER LEVEL

- Adjustable legs up to: 2.32 m (7.61 ft)
- With scale and vial
- 5/8" thread



## 886-28

### TRIPOD FOR LASER LEVEL

- Adjustable legs up to: 1.5 m (4.92 ft)
- Strong lightweight tripod
- Alignment vial
- 5/8" thread



## 886-20

### LASER ANGLE MOUNT

- Accurate indication of indicated angle



## 841

### TRIPOD ADAPTER

- Convert tripod thread from 1/4" UNC to 5/8" UNC



**886-30**EXTENDABLE POLE FOR  
LASER LEVEL

- Self-clamping between floor to ceiling
- Maximum height: 3.2 m (10.5 ft)
- Adjustable laser mount with 5/8" UNC thread

**886-58**

## POLE WITH TRIPOD

- Telescoping pole with locking sections
- Maximum height: 3.2 m (10.5 ft)
- Strong lightweight tripod stand with surface level
- Adjustable laser mount with 1/4" UNC thread



ZZC LEVELS25 / 10.2025



[WWW.KAPRO.COM](http://WWW.KAPRO.COM)